GATE TYPE - G05

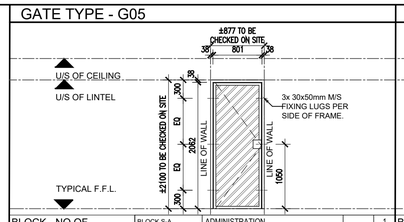

BLOCK - NO OF				
	BLOCK S-A	ADMINISTRATION		1
	BLOCK S-C	NUTRITION CENTRE LARGE		2
	BLOCK S-Y	MULTIPURPOSE HALL		1
	BLOCK S-AA	GUARD HOUSE		1
	BLOCK S-U	REFUSE YARD		-
	BLOCK S-AB	2X CLASSROOMS		2
	BLOCK S-R	2X CLASSROOMS + H.O.D		3
	BLOCK S-K,S-Q	4X CLASSROOMS		-
	BLOCK S-O	5X CLASSROOMS		5
	BLOCK S-D	3X CLASSROOMS+HOD+ FEMALE WC		6
	BLOCK S-L	3X CLASSROOMS + FEMALE WC		4
	BLOCK S-M	3X CLASSROOMS + MALE WC		5
	BLOCK S-E,S-P	4X CLASSROOM + FEMALE WC	2x6	12
	BLOCK S-F	4X CLASSROOM + MALE WC		6
	BLOCK S-B,S-Z	SCIENCE LAB	2x2	4
	BLOCK S-H,S-J	LIBRARY + COMPUTER RM + HOD	2x5	10
	BLOCK S-N,S-X	MULTIPURPOSE CLASSROOM	2x3	6
	BLOCK S-AC	MALE & FEMALE SPORTS ABLUTION		2
		TOTAL		70

GATE TYPE:	PURPOSE MADE 877 x 2100mm MILD STEEL SECURITY GATE. BRICKWORK OPENING SIZE TO BE CHECKED ON SITE PRIOR TO MANUFACTURE.
GATE:	38x38x2,5mm RECTANGULAR HOLLOW SECTION FRAME WITH 25x25x2,5mm INTERMEDIATES @ 100mm CENTRES AT A 45° ANGLE, COLOUR TO ARCHITECT'S SPECIFICATION
GATE FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
FRAME:	38 x 38 x 2,5mm M.S RECTANGULAR HOLLOW SECTION WELDED TO FORM FRAME FIXED TO BRICKWORK ON EACH SIDE WITH 3 x 30 x 50mm FIXING LUGS & RAW BOLTS REFER TO DETAIL.
FRAME FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
EXTRAS:	NONE
IRONMONGERY:	SECURITY DEAD LOCK (NO LATCH) WITH HANDLE BOTH SIDES, SEE BLOCK SPECIFIC IRONMONGERY SCHEDULE.

GATE TYPE - G06

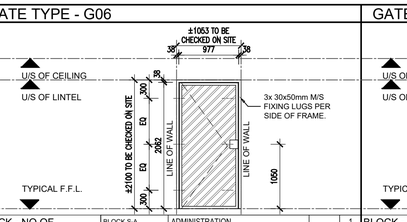

BLOCK - NO OF				
	BLOCK S-A	ADMINISTRATION		1
	BLOCK S-C	NUTRITION CENTRE LARGE		"
	BLOCK S-Y	MULTIPURPOSE HALL		-
	BLOCK S-AA	GUARD HOUSE		-
	BLOCK S-U	REFUSE YARD		-
	BLOCK S-AB	2X CLASSROOMS		-
	BLOCK S-R	2X CLASSROOMS + H.O.D		-
	BLOCK S-K,S-Q	4X CLASSROOMS		-
	BLOCK S-O	5X CLASSROOMS		-
	BLOCK S-D	3X CLASSROOMS+HOD+ FEMALE WC		-
	BLOCK S-L	3X CLASSROOMS + FEMALE WC		1
	BLOCK S-M	3X CLASSROOMS + MALE WC		1
	BLOCK S-E,S-P	4X CLASSROOM + FEMALE WC		-
	BLOCK S-F	4X CLASSROOM + MALE WC		1
	BLOCK S-B,S-Z	SCIENCE LAB		-
	BLOCK S-H,S-J	LIBRARY + COMPUTER RM + HOD		-
	BLOCK S-N,S-X	MULTIPURPOSE CLASSROOM		-
	BLOCK S-AC	MALE & FEMALE SPORTS ABLUTION		1
		TOTAL		5

GATE TYPE:	PURPOSE MADE 1053 x 2100mm MILD STEEL SECURITY GATE. BRICKWORK OPENING SIZE TO BE CHECKED ON SITE PRIOR TO MANUFACTURE.
GATE:	38x38x2,5mm RECTANGULAR HOLLOW SECTION FRAME WITH 25x25x2,5mm INTERMEDIATES @ 100mm CENTRES AT A 45° ANGLE, COLOUR TO ARCHITECT'S SPECIFICATION
GATE FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
FRAME:	38 x 38 x 2,5mm M.S RECTANGULAR HOLLOW SECTION WELDED TO FORM FRAME FIXED TO BRICKWORK ON EACH SIDE WITH 3 x 30 x 50mm FIXING LUGS & RAW BOLTS REFER TO DETAIL.
FRAME FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
EXTRAS:	NONE
IRONMONGERY:	SECURITY DEAD LOCK (NO LATCH) WITH HANDLE BOTH SIDES, SEE BLOCK SPECIFIC IRONMONGERY SCHEDULE.

GATE TYPE - G07

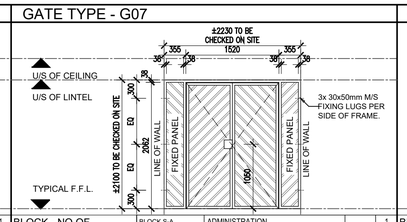

BLOCK - NO OF				
	BLOCK S-A	ADMINISTRATION		1
	BLOCK S-C	NUTRITION CENTRE LARGE		-
	BLOCK S-Y	MULTIPURPOSE HALL		-
	BLOCK S-AA	GUARD HOUSE		-
	BLOCK S-U	REFUSE YARD		-
	BLOCK S-AB	2X CLASSROOMS		-
	BLOCK S-R	2X CLASSROOMS + H.O.D		-
	BLOCK S-K,S-Q	4X CLASSROOMS		-
	BLOCK S-O	5X CLASSROOMS		-
	BLOCK S-D	3X CLASSROOMS+HOD+ FEMALE WC		-
	BLOCK S-L	3X CLASSROOMS + FEMALE WC		-
	BLOCK S-M	3X CLASSROOMS + MALE WC		-
	BLOCK S-E,S-P	4X CLASSROOM + FEMALE WC		-
	BLOCK S-F	4X CLASSROOM + MALE WC		-
	BLOCK S-B,S-Z	SCIENCE LAB		-
	BLOCK S-H,S-J	LIBRARY + COMPUTER RM + HOD		-
	BLOCK S-N,S-X	MULTIPURPOSE CLASSROOM		-
	BLOCK S-AC	MALE & FEMALE SPORTS ABLUTION		-
		TOTAL		1

GATE TYPE:	PURPOSE MADE 2230 x 2100mm MILD STEEL DOUBLE SECURITY GATE WITH FIXED SIDE PANELS. BRICKWORK OPENING SIZE TO BE CHECKED ON SITE PRIOR TO MANUFACTURE.
GATE:	38x38x2,5mm RECTANGULAR HOLLOW SECTION FRAME WITH 25x25x2,5mm INTERMEDIATES @ 100mm CENTRES AT A 45° ANGLE, COLOUR TO ARCHITECT'S SPECIFICATION
GATE FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
FRAME:	38 x 38 x 2,5mm M.S RECTANGULAR HOLLOW SECTION WELDED TO FORM FRAME FIXED TO BRICKWORK ON EACH SIDE WITH 3 x 30 x 50mm FIXING LUGS & RAW BOLTS REFER TO DETAIL.
FRAME FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
EXTRAS:	NONE
IRONMONGERY:	SECURITY DEAD LOCK (NO LATCH) WITH HANDLE BOTH SIDES, SEE BLOCK SPECIFIC IRONMONGERY SCHEDULE.

GATE TYPE - G08

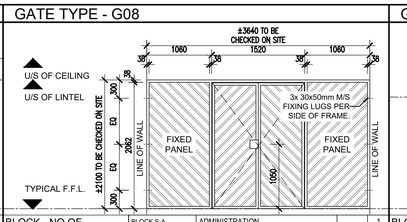

BLOCK - NO OF				
	BLOCK S-A	ADMINISTRATION		1
	BLOCK S-C	NUTRITION CENTRE LARGE		-
	BLOCK S-Y	MULTIPURPOSE HALL		-
	BLOCK S-AA	GUARD HOUSE		-
	BLOCK S-U	REFUSE YARD		-
	BLOCK S-AB	2X CLASSROOMS		-
	BLOCK S-R	2X CLASSROOMS + H.O.D		-
	BLOCK S-K,S-Q	4X CLASSROOMS		-
	BLOCK S-O	5X CLASSROOMS		-
	BLOCK S-D	3X CLASSROOMS+HOD+ FEMALE WC		-
	BLOCK S-L	3X CLASSROOMS + FEMALE WC		-
	BLOCK S-M	3X CLASSROOMS + MALE WC		-
	BLOCK S-E,S-P	4X CLASSROOM + FEMALE WC		-
	BLOCK S-F	4X CLASSROOM + MALE WC		-
	BLOCK S-B,S-Z	SCIENCE LAB		-
	BLOCK S-H,S-J	LIBRARY + COMPUTER RM + HOD		-
	BLOCK S-N,S-X	MULTIPURPOSE CLASSROOM		-
	BLOCK S-AC	MALE & FEMALE SPORTS ABLUTION		-
		TOTAL		1

GATE TYPE:	PURPOSE MADE 3640 x 2100mm MILD STEEL DOUBLE SECURITY GATE WITH FIXED SIDE PANELS. BRICKWORK OPENING SIZE TO BE CHECKED ON SITE PRIOR TO MANUFACTURE.
GATE:	38x38x2,5mm RECTANGULAR HOLLOW SECTION FRAME WITH 25x25x2,5mm INTERMEDIATES @ 100mm CENTRES AT A 45° ANGLE, COLOUR TO ARCHITECT'S SPECIFICATION
GATE FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
FRAME:	38 x 38 x 2,5mm M.S RECTANGULAR HOLLOW SECTION WELDED TO FORM FRAME FIXED TO BRICKWORK ON EACH SIDE WITH 3 x 30 x 50mm FIXING LUGS & RAW BOLTS REFER TO DETAIL.
FRAME FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
EXTRAS:	NONE
IRONMONGERY:	SECURITY DEAD LOCK (NO LATCH) WITH HANDLE BOTH SIDES, SEE BLOCK SPECIFIC IRONMONGERY SCHEDULE.

GATE TYPE - G10

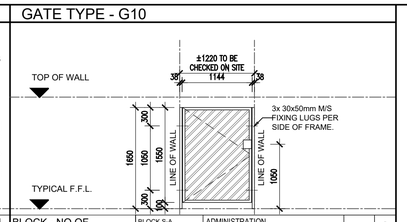

BLOCK - NO OF				
	BLOCK S-A	ADMINISTRATION		-
	BLOCK S-C	NUTRITION CENTRE LARGE		1
	BLOCK S-Y	MULTIPURPOSE HALL		-
	BLOCK S-AA	GUARD HOUSE		-
	BLOCK S-U	REFUSE YARD		-
	BLOCK S-AB	2X CLASSROOMS		-
	BLOCK S-R	2X CLASSROOMS + H.O.D		-
	BLOCK S-K,S-Q	4X CLASSROOMS		-
	BLOCK S-O	5X CLASSROOMS		-
	BLOCK S-D	3X CLASSROOMS+HOD+ FEMALE WC		-
	BLOCK S-L	3X CLASSROOMS + FEMALE WC		-
	BLOCK S-M	3X CLASSROOMS + MALE WC		-
	BLOCK S-E,S-P	4X CLASSROOM + FEMALE WC		-
	BLOCK S-F	4X CLASSROOM + MALE WC		-
	BLOCK S-B,S-Z	SCIENCE LAB		-
	BLOCK S-H,S-J	LIBRARY + COMPUTER RM + HOD		-
	BLOCK S-N,S-X	MULTIPURPOSE CLASSROOM		-
	BLOCK S-AC	MALE & FEMALE SPORTS ABLUTION		-
		TOTAL		1

GATE TYPE:	PURPOSE MADE 1220 x 1650mm MILD STEEL SECURITY GATE WITH FIXED SIDE PANELS. BRICKWORK OPENING SIZE TO BE CHECKED ON SITE PRIOR TO MANUFACTURE.
GATE:	38x38x2,5mm RECTANGULAR HOLLOW SECTION FRAME WITH 25x25x2,5mm INTERMEDIATES @ 100mm CENTRES AT A 45° ANGLE, COLOUR TO ARCHITECT'S SPECIFICATION
GATE FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
FRAME:	38 x 38 x 2,5mm M.S RECTANGULAR HOLLOW SECTION WELDED TO FORM FRAME FIXED TO BRICKWORK ON EACH SIDE WITH 3 x 30 x 50mm FIXING LUGS & RAW BOLTS REFER TO DETAIL.
FRAME FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
EXTRAS:	NONE
IRONMONGERY:	SECURITY DEAD LOCK (NO LATCH) WITH HANDLE BOTH SIDES, SEE BLOCK SPECIFIC IRONMONGERY SCHEDULE.

GATE TYPE - G13

BLOCK - NO OF				
	BLOCK S-A	ADMINISTRATION		-
	BLOCK S-C	NUTRITION CENTRE LARGE		"
	BLOCK S-Y	MULTIPURPOSE HALL		-
	BLOCK S-AA	GUARD HOUSE		-
	BLOCK S-U	REFUSE YARD		-
	BLOCK S-AB	2X CLASSROOMS		-
	BLOCK S-R	2X CLASSROOMS + H.O.D		-
	BLOCK S-K,S-Q	4X CLASSROOMS		-
	BLOCK S-O	5X CLASSROOMS		-
	BLOCK S-D	3X CLASSROOMS+HOD+ FEMALE WC		-
	BLOCK S-L	3X CLASSROOMS + FEMALE WC		-
	BLOCK S-M	3X CLASSROOMS + MALE WC		-
	BLOCK S-E,S-P	4X CLASSROOM + FEMALE WC		-
	BLOCK S-F	4X CLASSROOM + MALE WC		-
	BLOCK S-B,S-Z	SCIENCE LAB		-
	BLOCK S-H,S-J	LIBRARY + COMPUTER RM + HOD		-
	BLOCK S-N,S-X	MULTIPURPOSE CLASSROOM		-
	BLOCK S-AC	MALE & FEMALE SPORTS ABLUTION		-
		TOTAL		##

GATE TYPE:	PURPOSE MADE 1360 x 2100mm MILD STEEL 1½ DOOR SECURITY GATE WITH FIXED SIDE PANELS. BRICKWORK OPENING SIZE TO BE CHECKED ON SITE PRIOR TO MANUFACTURE.
GATE:	38x38x2,5mm RECTANGULAR HOLLOW SECTION FRAME WITH 25x25x2,5mm INTERMEDIATES @ 100mm CENTRES AT A 45° ANGLE, COLOUR TO ARCHITECT'S SPECIFICATION
GATE FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
FRAME:	38 x 38 x 2,5mm M.S RECTANGULAR HOLLOW SECTION WELDED TO FORM FRAME FIXED TO BRICKWORK ON EACH SIDE WITH 3 x 30 x 50mm FIXING LUGS & RAW BOLTS REFER TO DETAIL.
FRAME FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
EXTRAS:	NONE
IRONMONGERY:	SECURITY DEAD LOCK (NO LATCH) WITH HANDLE BOTH SIDES, SEE BLOCK SPECIFIC IRONMONGERY SCHEDULE.

GATE TYPE - G14

BLOCK - NO OF				
	BLOCK S-A	ADMINISTRATION		-
	BLOCK S-C	NUTRITION CENTRE LARGE		-
	BLOCK S-Y	MULTIPURPOSE HALL		-
	BLOCK S-AA	GUARD HOUSE		-
	BLOCK S-U	REFUSE YARD		1
	BLOCK S-AB	2X CLASSROOMS		-
	BLOCK S-R	2X CLASSROOMS + H.O.D		-
	BLOCK S-K,S-Q	4X CLASSROOMS		-
	BLOCK S-O	5X CLASSROOMS		-
	BLOCK S-D	3X CLASSROOMS+HOD+ FEMALE WC		-
	BLOCK S-L	3X CLASSROOMS + FEMALE WC		-
	BLOCK S-M	3X CLASSROOMS + MALE WC		-
	BLOCK S-E,S-P	4X CLASSROOM + FEMALE WC		-
	BLOCK S-F	4X CLASSROOM + MALE WC		-
	BLOCK S-B,S-Z	SCIENCE LAB		-
	BLOCK S-H,S-J	LIBRARY + COMPUTER RM + HOD		-
	BLOCK S-N,S-X	MULTIPURPOSE CLASSROOM		-
	BLOCK S-AC	MALE & FEMALE SPORTS ABLUTION		-
		TOTAL		1

GATE:	101mm x 3mm SQUARE TUBE HINGE POST WITH 76mm x 2mm SQUARE TUBE LOCKING POST AND 76mm x 2mm SQUARE TUBE GATE FRAME. GATE HINGE TO HAVE ADJUSTABLE SCREW AND COVER. PLATE TO BE 270mm x 50mm x 5mm
GATE FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
FRAME:	76mm X 76mm SQUARE TUBE GATE FRAME WITH MESH TO MATCH FENCE LINE
FRAME FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
EXTRAS:	COCHRANE SHARK TOOTH SPIKE: 2mm THICK TOUGHENED STEEL AND 100mm HIGH TOPPING.
IRONMONGERY:	TO MANUFACTURERS SPECIFICATION

GATE TYPE - G15

BLOCK - NO OF				
	BLOCK S-A	ADMINISTRATION		-
	BLOCK S-C	NUTRITION CENTRE LARGE		-
	BLOCK S-Y	MULTIPURPOSE HALL		-
	BLOCK S-AA	GUARD HOUSE		-
	BLOCK S-U	REFUSE YARD		1
	BLOCK S-AB	2X CLASSROOMS		-
	BLOCK S-R	2X CLASSROOMS + H.O.D		-
	BLOCK S-K,S-Q	4X CLASSROOMS		-
	BLOCK S-O	5X CLASSROOMS		-
	BLOCK S-D	3X CLASSROOMS+HOD+ FEMALE WC		-
	BLOCK S-L	3X CLASSROOMS + FEMALE WC		-
	BLOCK S-M	3X CLASSROOMS + MALE WC		-
	BLOCK S-E,S-P	4X CLASSROOM + FEMALE WC		-
	BLOCK S-F	4X CLASSROOM + MALE WC		-
	BLOCK S-B,S-Z	SCIENCE LAB		-
	BLOCK S-H,S-J	LIBRARY + COMPUTER RM + HOD		-
	BLOCK S-N,S-X	MULTIPURPOSE CLASSROOM		-
	BLOCK S-AC	MALE & FEMALE SPORTS ABLUTION		-
		TOTAL		1

GATE:	101mm x 3mm SQUARE TUBE HINGE POST WITH 76mm x 2mm SQUARE TUBE LOCKING POST AND 76mm x 2mm SQUARE TUBE GATE FRAME. GATE HINGE TO HAVE ADJUSTABLE SCREW AND COVER. PLATE TO BE 270mm x 50mm x 5mm
GATE FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
FRAME:	76mm X 76mm SQUARE TUBE GATE FRAME WITH MESH TO MATCH FENCE LINE
FRAME FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
EXTRAS:	COCHRANE SHARK TOOTH SPIKE: 2mm THICK TOUGHENED STEEL AND 100mm HIGH TOPPING.
IRONMONGERY:	TO MANUFACTURERS SPECIFICATION

GATE TYPE - G16

BLOCK - NO OF				
	BLOCK S-A	ADMINISTRATION		-
	BLOCK S-C	NUTRITION CENTRE LARGE		-
	BLOCK S-Y	MULTIPURPOSE HALL		-
	BLOCK S-AA	GUARD HOUSE		-
	BLOCK S-U	REFUSE YARD		-
	BLOCK S-AB	2X CLASSROOMS		-
	BLOCK S-R	2X CLASSROOMS + H.O.D		-
	BLOCK S-K,S-Q	4X CLASSROOMS		-
	BLOCK S-O	5X CLASSROOMS		-
	BLOCK S-D	3X CLASSROOMS+HOD+ FEMALE WC		-
	BLOCK S-L	3X CLASSROOMS + FEMALE WC		-
	BLOCK S-M	3X CLASSROOMS + MALE WC		-
	BLOCK S-E,S-P	4X CLASSROOM + FEMALE WC		-
	BLOCK S-F	4X CLASSROOM + MALE WC		-
	BLOCK S-B,S-Z	SCIENCE LAB		-
	BLOCK S-H,S-J	LIBRARY + COMPUTER RM + HOD		-
	BLOCK S-N,S-X	MULTIPURPOSE CLASSROOM		-
	BLOCK S-AC	MALE & FEMALE SPORTS ABLUTION		-
		TOTAL		1

GATE:	101mm x 3mm SQUARE TUBE HINGE POST WITH 76mm x 2mm SQUARE TUBE LOCKING POST AND 76mm x 2mm SQUARE TUBE GATE FRAME. GATE HINGE TO HAVE ADJUSTABLE SCREW AND COVER. PLATE TO BE 270mm x 50mm x 5mm
GATE FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
FRAME:	76mm X 76mm SQUARE TUBE GATE FRAME WITH MESH TO MATCH FENCE LINE
FRAME FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
EXTRAS:	COCHRANE SHARK TOOTH SPIKE: 2mm THICK TOUGHENED STEEL AND 100mm HIGH TOPPING.
IRONMONGERY:	TO MANUFACTURERS SPECIFICATION

GATE TYPE - G17

BLOCK - NO OF				
	BLOCK S-A	ADMINISTRATION		-
	BLOCK S-C	NUTRITION CENTRE LARGE		-
	BLOCK S-Y	MULTIPURPOSE HALL		-
	BLOCK S-AA	GUARD HOUSE		-
	BLOCK S-U	REFUSE YARD		-
	BLOCK S-AB	2X CLASSROOMS		-
	BLOCK S-R	2X CLASSROOMS + H.O.D		-
	BLOCK S-K,S-Q	4X CLASSROOMS		-
	BLOCK S-O	5X CLASSROOMS		-
	BLOCK S-D	3X CLASSROOMS+HOD+ FEMALE WC		-
	BLOCK S-L	3X CLASSROOMS + FEMALE WC		-
	BLOCK S-M	3X CLASSROOMS + MALE WC		-
	BLOCK S-E,S-P	4X CLASSROOM + FEMALE WC		-
	BLOCK S-F	4X CLASSROOM + MALE WC		-
	BLOCK S-B,S-Z	SCIENCE LAB		-
	BLOCK S-H,S-J	LIBRARY + COMPUTER RM + HOD		-
	BLOCK S-N,S-X	MULTIPURPOSE CLASSROOM		-
	BLOCK S-AC	MALE & FEMALE SPORTS ABLUTION		-
		TOTAL		##

GATE:	101mm x 3mm SQUARE TUBE HINGE POST WITH 76mm x 2mm SQUARE TUBE LOCKING POST AND 76mm x 2mm SQUARE TUBE GATE FRAME. GATE HINGE TO HAVE ADJUSTABLE SCREW AND COVER. PLATE TO BE 270mm x 50mm x 5mm
GATE FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
FRAME:	76mm X 76mm SQUARE TUBE GATE FRAME WITH MESH TO MATCH FENCE LINE
FRAME FINISH:	1 x COAT ZINC CHROMATE PRIMER 2 x COATS GLOSS ENAMEL (EXTERIOR QUALITY)
EXTRAS:	COCHRANE SHARK TOOTH SPIKE: 2mm THICK TOUGHENED STEEL AND 100mm HIGH TOPPING.
IRONMONGERY:	TO MANUFACTURERS SPECIFICATION

NOTE:
ALL WORKS TO COMPLY WITH SANS 10400, XA AND 204

FOR ALL PREFABRICATED BUILDING COMPONENTS, THE MANUFACTURER MUST SUBMIT SHOP DRAWINGS FOR COMMENT / REVIEW AND OR APPROVAL FROM THE PROFESSIONAL TEAM

Title: PLAN Scale: 1:20

Title: SECTION A-A Scale: 1:20

Title: DETAIL A Scale: 1:2

Title: DETAIL B Scale: 1:2

NO.	DATE	REVISION	DRAWN
AA	2022-07-29	ISSUE FOR MEASURE	DW
AB	2022-08-16	G10 AND G15 NOT TO BE OMITTED AS INDICATED IN PREVIOUS REV AA	DW

ISSUED FOR APPROVAL

PSP

ARCHITECT

ARCHITECTURAL PROFESSIONAL SACAP NUMBERS:
H.L. MANTEL SACAP 3045

IMPLEMENTED BY

INDEPENDENT DEVELOPMENT TRUST

	SIGNATURE	DATE	SHEET SIZE
DESIGNED	-	-	A1
DRAWN	SG	22/06/2017	SCALE 1:100
VERIFIED	-	-	STATUS LEGEND: I = INFORMATION, FM = FOR MEASURE, T = TENDER, C = CONSTRUCTION, AB = AS BUILT
VALIDATED	-	-	

CLIENT

Province of the EASTERN CAPE EDUCATION

IMPLEMENTING AGENT

idt

PROJECT
DOE PORTFOLIO PROGRAMME
ESTABLISHMENT OF NEW SCHOOLS
HILLBROW - SENIOR SECONDARY SCHOOL

PROVINCE: **EASTERN CAPE PROVINCE**

DRAWING TITLE
TYPICAL DOOR SCHEDULE (3 OF 3)

Stand Co-Ordinates:

EMIS NUMBER	DISCIPLINE	DRAWING NUMBER	STATUS	REVISION
200500293	ARCH	2204 w05-01-502	FA	AB